(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property **Organization**

International Bureau



(43) International Publication Date 22 July 2004 (22.07.2004)

PCT

(10) International Publication Number WO 2004/062276 A1

(51) International Patent Classification⁷:

H04N 5/38

(21) International Application Number:

PCT/EP2003/051051

(22) International Filing Date:

18 December 2003 (18.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0300159

6 January 2003 (06.01.2003)

(71) Applicant (for all designated States except US): THOM-SON LICENSING S.A. [FR/FR]; 46, Quai Alphonse Le Gallo, F-92100 Boulogne-Billancourt (FR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): MOCQUARD, Olivier [FR/FR]; 12, Rue Hoche, F-35000 Rennes (FR). PINTOS, Jean-François [FR/FR]; Le Bas Sommier, F-35740 Pace (FR). ROBERT, Jean-Luc [FR/FR]; 2, rue Paul Gauguin, F-35830 Betton (FR). THUDOR, Franck [FR/FR]; 28, rue François-Charles Oberthur, F-35000 Rennes (FR).

- (74) Agents: COUR, Pierre et al.; Thomson, 46, Quai Alphonse Le Gallo, F-92100 Boulogne-Billancourt (FR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

.

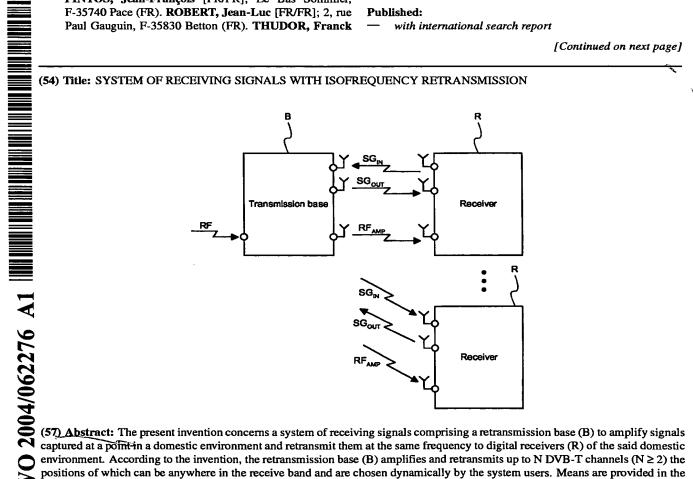

environment. According to the invention, the retransmission base (B) amplifies and retransmits up to N DVB-T channels (N ≥ 2) the positions of which can be anywhere in the receive band and are chosen dynamically by the system users. Means are provided in the system to share the system's amplification resources between the system's various digital receivers (R).

